


# OAB18055 Series



AC Blower, ball bearing  
182x55 (7.17"x 2.17")

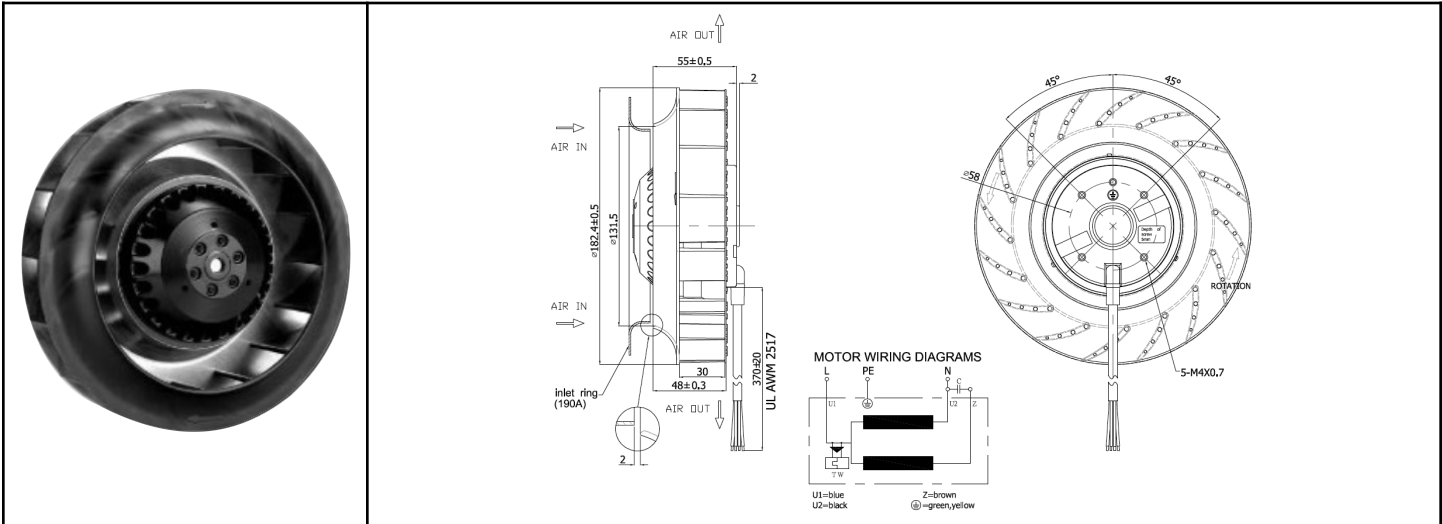

<b>Backwards Curved Impeller</b>		<p><u>Insulation Housing:</u> AC1500V / 1 minute</p> <p><u>Insulation Resistance:</u> &gt; 100 M ohms DC500V</p> <p><u>Operating Temperature</u> -40 C ~ +60C</p> <p><u>Life Expectancy</u> 40,000 hours (L10, 40C) Ball bearing</p> <p>IP55 Rated Weight 2.65 lbs.</p> <p>m2</p>	<p>Blue = 60Hz Red = 50Hz</p>
<b>Frame &amp; Impeller</b>	<p>Frame - Diecast aluminum Impeller - UL94V-O Thermoplastic</p>		
<b>Connection</b>	Lead Wires		
<b>Motor</b>	<p>AC Capacitor drive 10uF/250V (115V) 2uF/450V (230V) (Capacitor Included)</p>		
<b>Bearing System</b>	Dual Ball		

Part Number	OAB18055-11-1WB	OAB18055-22-1WB
Nominal Voltage	115 VAC (50/60 Hz)	230 VAC (50/60 Hz)
Nominal Current (Amps)	0.60 / 0.70	0.30 / 0.34
Locked Current (Amps)	0.92 / 0.95	0.46 / 0.48
Rated Power	63 / 78 W	63 / 78 W
Rated Speed (RPM)	2550 / 2800	2550 / 2800
Airflow (CFM)	265 / 290	265 / 290
Noise Level (dB)	64 / 67	64 / 67
Max. Static Pressure	1.0 / 1.4" H <sub>2</sub> O	1.0 / 1.4" H <sub>2</sub> O