


OAB908 Side Inlet Blower



AC Blower, ball bearing, Dual Speed
183x190x70mm (7.2"x 7.5"x 2.8")

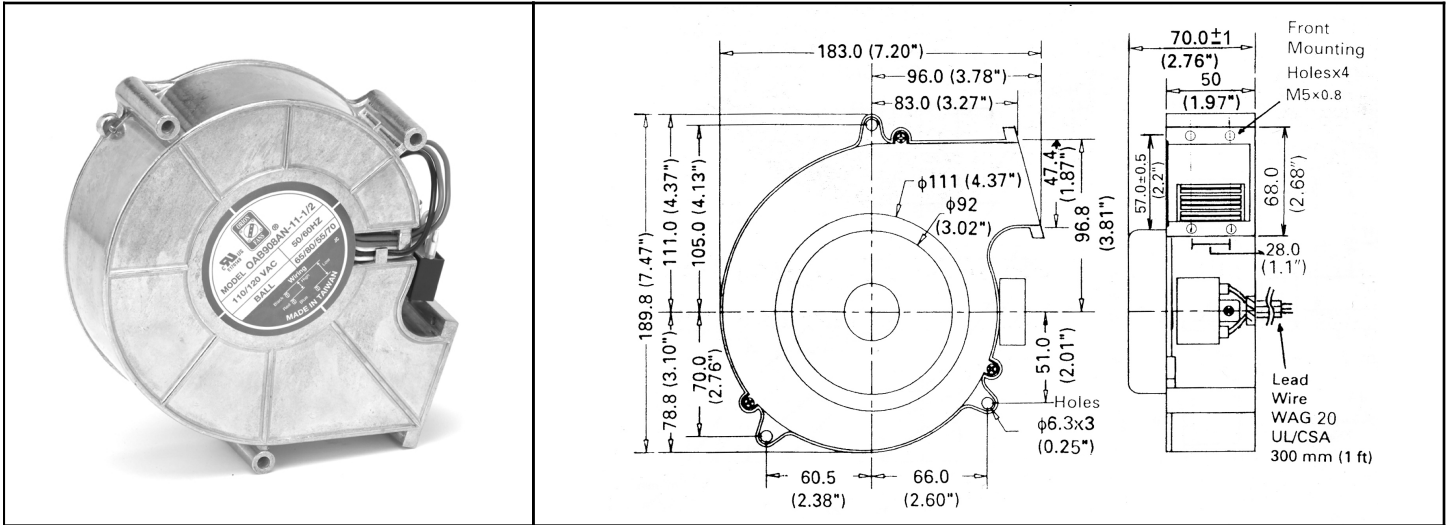


| | |
|---|--|
| Dual Speed Blower (High, Medium) | |
| Frame & Impeller | Aluminum die-cast shell with UL94V-0 impeller |
| Connection | Lead Wires |
| Motor | Single phase, capacitor induction, 2/4 pole, inner rotor, thermal protection - Frame: Aluminum die-cast, natural color treatment case, steel plate housing cover |
| Bearing System | Dual ball - sealed |

Operating Temp: Ambient non-condensing allowable thermal range -20C~+75C

-L10 Life: MTBF life test 80,000 hours at +45C, 40,000 hours at +60C

-Dielectric Strength: Over 1 min. at 1,500 VAC, 0.5mA, 50/60 Hz

-Insulation Resistance: Over 100 Mega Ohm at DC 500V

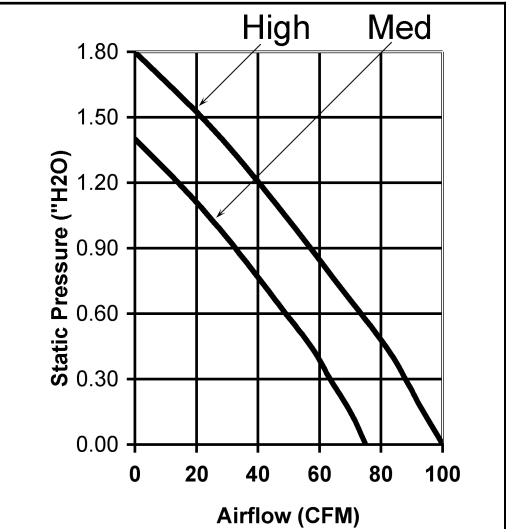


| | |
|-----------------------------|---------------------|
| Model Number | OAB908AN-11-1/2 |
| Part Number | 264311060 |
| Nominal Voltage | 115 VAC |
| Voltage Range | 100 ~ 125 VAC |
| Rated Power | 80 W / 65 W |
| Rated Speed (RPM) | 3100 / 2400 |
| Airflow (CFM) | 100 / 75 |
| Noise Level (dB) | 68 / 55 |
| Max. Static Pressure | 1.8 "H2O / 1.4 "H2O |

OAB908 Ultra Low Speed



AC Blower, ball bearing
183x190x70mm (7.2"x 7.5"x 2.8")

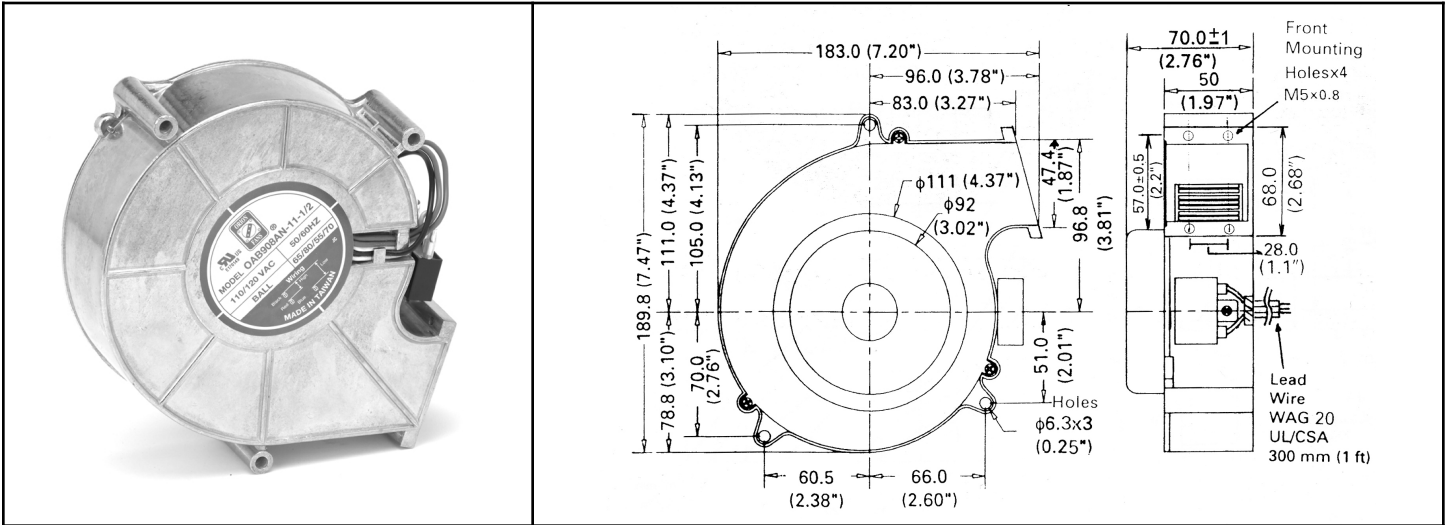


| | |
|-----------------------------|--|
| Side Inlet Blower | |
| Frame & Impeller | Aluminum die-cast shell with UL94V-0 impeller |
| Connection | Lead Wires |
| Motor | Single phase, capacitor induction, 2/4 pole, inner rotor, thermal protection -Frame: Aluminum die-cast, natural color treatment case, steel plate housing cover |
| Bearing System | Dual ball - sealed |

Operating Temp: Ambient non-condensing allowable thermal range -20C~+75C

-L10 Life: MTBF life test 80,000 hours at +45C, 40,000 hours at +60C

-Dielectric Strength: Over 1 min. at 1,500 VAC, 0.5mA, 50/60 Hz

-Insulation Resistance: Over 100 Mega Ohm at DC 500V

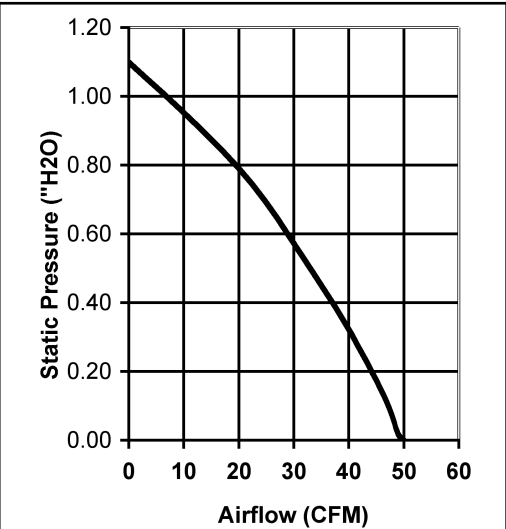


| Model Number | OAB908AN-11-3 | OAB908AN-22-3 |
|----------------------|---------------|---------------|
| Part Number | 264331000 | 264631000 |
| Nominal Voltage | 115 VAC | 230 VAC |
| Voltage Range | 60 ~ 130 | 100 ~ 260 |
| Rated Power | 60 W | 60 W |
| Rated Speed (RPM) | 1000 | 1000 |
| Airflow (CFM) | 50 | 50 |
| Noise Level (dB) | 40 | 40 |
| Max. Static Pressure | 1.1 "H2O | 1.1 "H2O |

OAB908 Side Inlet Blower



AC Blower, ball bearing, Dual Speed
183x190x70mm (7.2"x 7.5"x 2.8")

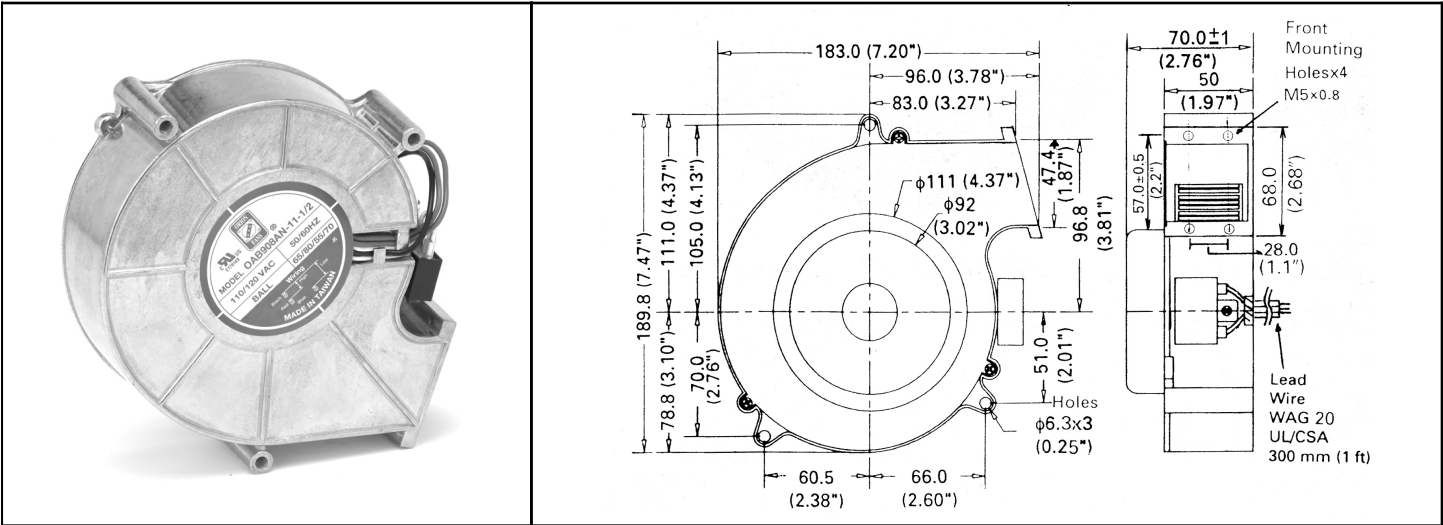


| | |
|---|--|
| Dual Speed Blower (High, Medium) | |
| Frame & Impeller | Aluminum die-cast shell with UL94V-0 impeller |
| Connection | Lead Wires |
| Motor | Single phase, capacitor induction, 2/4 pole, inner rotor, thermal protection - Frame: Aluminum die-cast, natural color treatment case, steel plate housing cover |
| Bearing System | Dual ball - sealed |

Operating Temp: Ambient non-condensing allowable thermal range -20C~+75C

-L10 Life: MTBF life test 80,000 hours at +45C, 40,000 hours at +60C

-Dielectric Strength: Over 1 min. at 1,500 VAC, 0.5mA, 50/60 Hz

-Insulation Resistance: Over 100 Mega Ohm at DC 500V

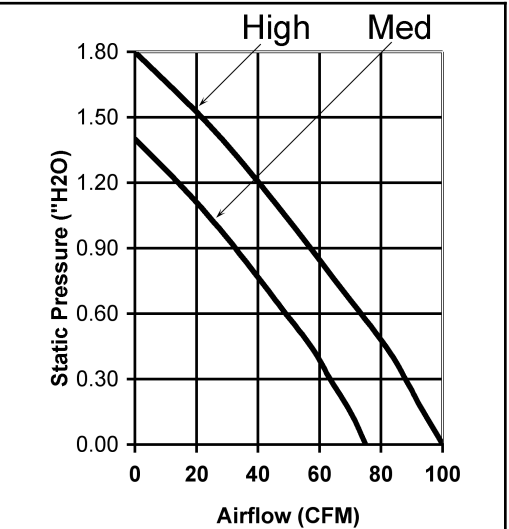


| | |
|-----------------------------|---------------------|
| Model Number | OAB908AN-22-1/2 |
| Part Number | 264611060 |
| Nominal Voltage | 230 VAC |
| Voltage Range | 200 ~ 240 VAC |
| Rated Power | 80 W / 65 W |
| Rated Speed (RPM) | 3100 / 2400 |
| Airflow (CFM) | 100 / 75 |
| Noise Level (dB) | 68 / 55 |
| Max. Static Pressure | 1.8 "H2O / 1.4 "H2O |

OAB908 Ultra Low Speed



AC Blower, ball bearing
183x190x70mm (7.2"x 7.5"x 2.8")

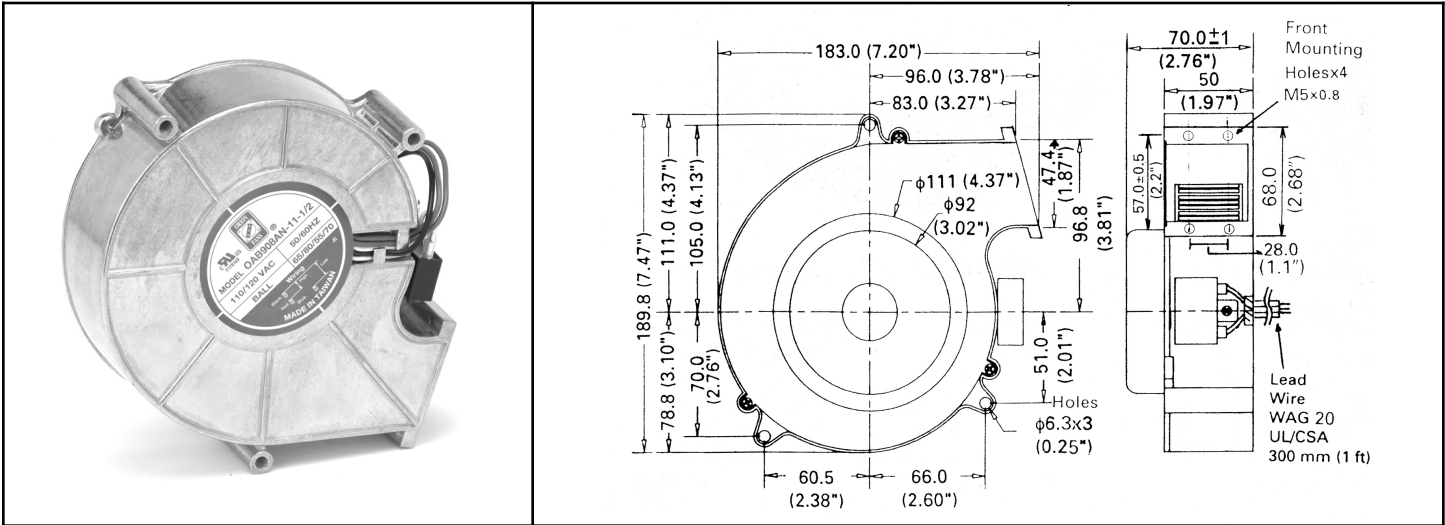


| | |
|-----------------------------|--|
| Side Inlet Blower | |
| Frame & Impeller | Aluminum die-cast shell with UL94V-0 impeller |
| Connection | Lead Wires |
| Motor | Single phase, capacitor induction, 2/4 pole, inner rotor, thermal protection -Frame: Aluminum die-cast, natural color treatment case, steel plate housing cover |
| Bearing System | Dual ball - sealed |

Operating Temp: Ambient non-condensing allowable thermal range -20C~+75C

-L10 Life: MTBF life test 80,000 hours at +45C, 40,000 hours at +60C

-Dielectric Strength: Over 1 min. at 1,500 VAC, 0.5mA, 50/60 Hz

-Insulation Resistance: Over 100 Mega Ohm at DC 500V

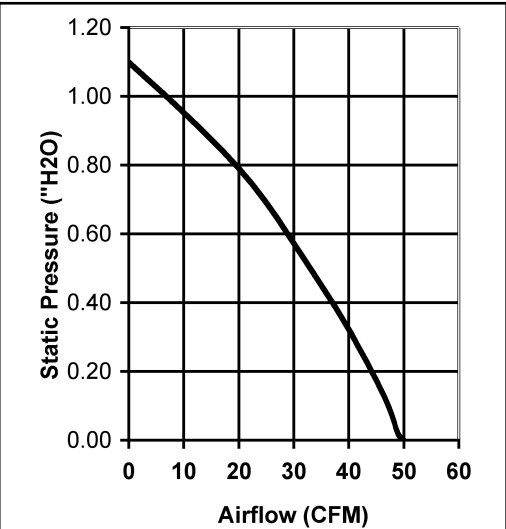

| Model Number | OAB908AN-11-3 | OAB908AN-22-3 |
|----------------------|---------------|---------------|
| Part Number | 264331000 | 264631000 |
| Nominal Voltage | 115 VAC | 230 VAC |
| Voltage Range | 60 ~ 130 | 100 ~ 260 |
| Rated Power | 60 W | 60 W |
| Rated Speed (RPM) | 1000 | 1000 |
| Airflow (CFM) | 50 | 50 |
| Noise Level (dB) | 40 | 40 |
| Max. Static Pressure | 1.1 "H2O | 1.1 "H2O |