




OA109AP Dual Voltage

AC Fans - 115, 230V
120mm x 38mm (4.7" x 1.5")

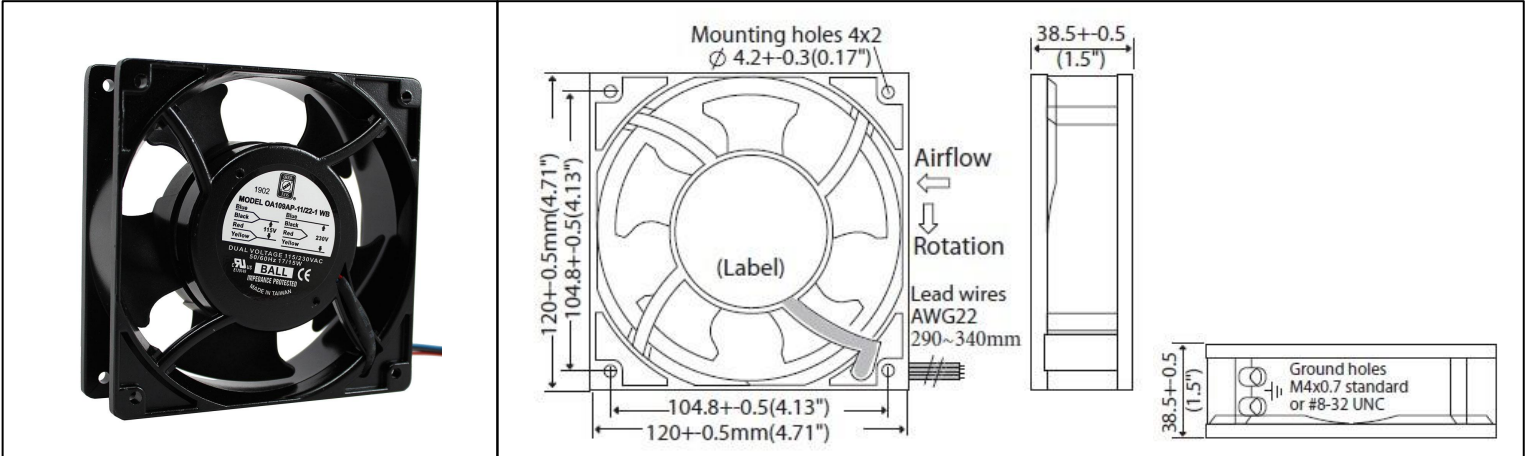


Frame	Die Cast Aluminum, Black Finish	Operating Temperature -20°C ~ +70°C Storage Temperature -40°C ~ +100°C Life Expectancy 80,000 Hours (L10 at 45°C) Weight: 1.2 lbs.
Impeller	PBT, UL94 V-0 Plastic	
Connection	4x Lead Wires, UL 1430 22 AWG	
Motor	Shaded Pole, Single Phase, Impedance Protected	
Bearing System	Dual Ball Bearings	
Dielectric Strength	1500VAC/min, <1mA	
Insulation Resistance	≥10M Ohm @ 500 VAC	

*60 Hz PQ Airflow Data specifications shown

Part Number	Rated Voltage (Volts AC)	Frequency (Hertz)	Voltage Range (Volts AC)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OA109AP-11/22-1WB	115 / 230	50 / 60	100-120 200-240	17 / 15	2600 / 3000	90 / 105	42	0.29 / 0.31
OA109AP-11/22-2WB	115 / 230	50 / 60	100-120 200-240	13 / 11	2400 / 2350	77 / 71	35	0.21 / 0.18
OA109AP-11/22-3WB	115 / 230	50 / 60	100-120 200-240	10 / 8	2000 / 1400	66 / 53	27	0.17 / 0.13

Dual Voltage Wiring Diagram 115VAC

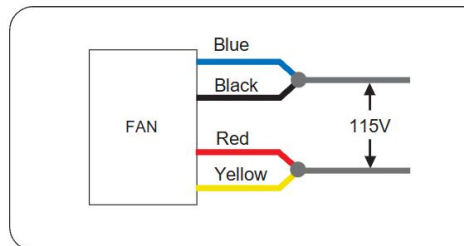

Dual Voltage Wiring Diagram 230VAC

