


OA109EC-IP68-ATEX Series



AC Fan, 115V / 230V Universal Input
120x38mm (4.7"x 1.5")

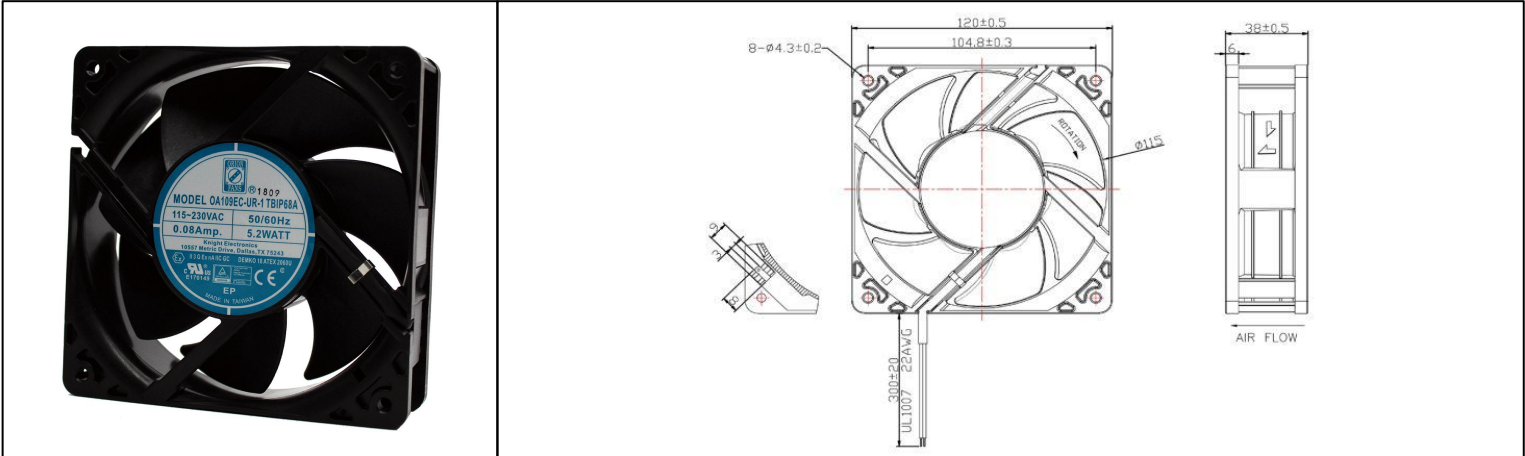

| | | | |
|------------------------------|--|--|--|
| Frame | PBT, UL94 V-0 plastic | Operating Temperature -20°C ~ +70°C Life Expectancy 60,000 hours (L10 at 40°C) IP68 Rating with ATEX Certification Weight: 0.64 lbs m2 | |
| Impeller | PBT, UL94 V-0 plastic | | |
| Connection | 2x Lead wires, or Terminal | | |
| Motor | EC Motor, Electronically Protected, IP68 | | |
| Bearing System | Dual Ball Bearings | | |
| Dielectric Strength | 500VAC/min | | |
| Insulation Resistance | Over 10MΩ at DC 500V | | |

| Part Number | Rated Voltage | Nominal Power | Rated Current | Rated Speed (RPM) | Airflow (CFM) | Noise Level (dB) | Max. Static Pressure |
|---------------------|---------------|-----------------------------|-------------------------------|-------------------|---------------|------------------|-----------------------|
| OA109EC-UR-1*WIP68A | 115V-230V | 4.9W @ 115V, 5.2W @ 230V | 0.08A @ 115V, 0.06A @ 230V | 3200 | 106 | 43 | 0.34"H ₂ O |

* Indicates "T" (Terminal) or "W" (Wire Leads)