


# OA162 Series



AC Fan - 115V, 230V  
172 x 55mm (6.7" x 2.2")

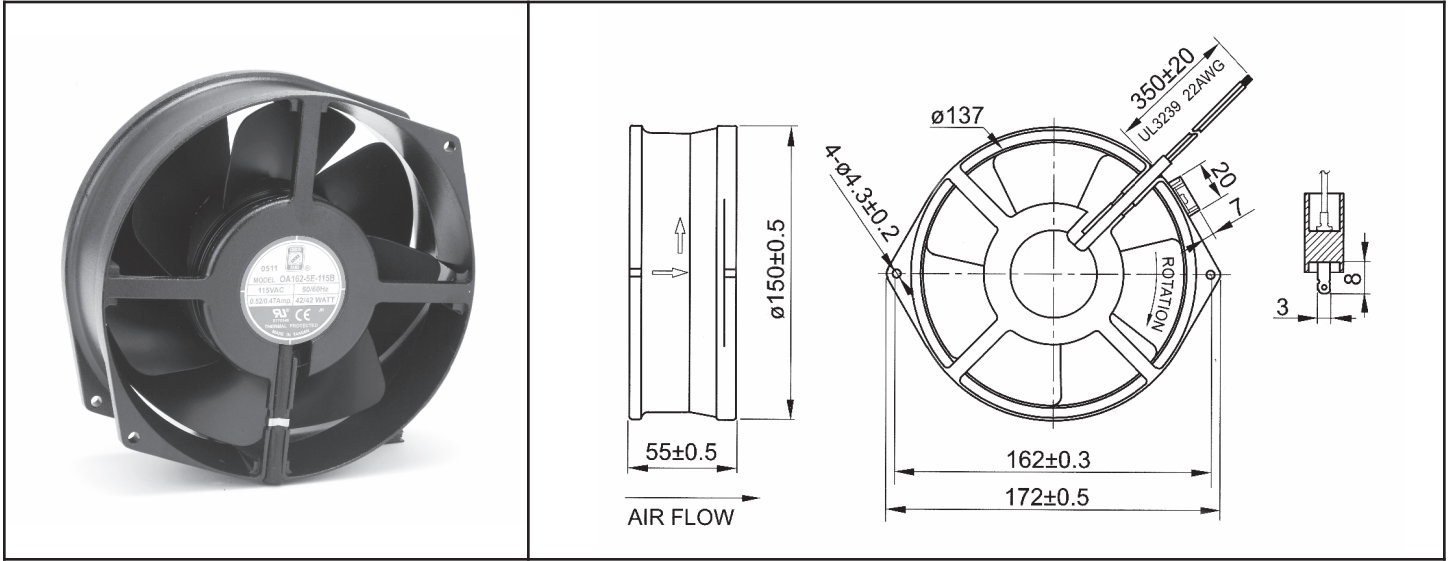

|                       |  |  |  |
|-----------------------|--|--|--|
| Frame & Impeller      | Diecast Aluminum                               | <p><u>Operating Temperature</u><br/>Ball Bearing<br/>-40C ~ +70C<br/>Storage Temp<br/>-40C ~ +80C</p> <p><u>Life Expectancy</u><br/>Ball Bearing<br/>60,000 hours (L10 at 40C)</p> <p>Weight: ~ 2.4 lbs.</p> |  |
| Connection            | Terminals or Lead Wires                        |  |  |
| Motor                 | Shaded Pole, thermally protected               |  |  |
| Bearing System        | Dual ball (Sleeve available)                   |  |  |
| Insulation Resistance | >100M ohm between lead-wire and frame (500VDC) |  |  |
| Dielectric Strength   | 1 min at 1500 VAC, 50/60Hz                     |  |  |

| Part Number          | OA162-5E-115 * B       | OA162-5E-230 * B       |
|----------------------|------------------------|------------------------|
| Nominal Voltage      | 115 VAC                | 230 VAC                |
| Voltage Range        | 80 ~ 130 VAC           | 160 ~ 260 VAC          |
| Rated Power          | 31 W (60Hz)            | 31 W (60Hz)            |
| Rated Speed (RPM)    | 3400                   | 3400                   |
| Airflow (CFM)        | 241                    | 241                    |
| Noise Level (dB)     | 66                     | 66                     |
| Max. Static Pressure | 0.73" H <sub>2</sub> O | 0.73" H <sub>2</sub> O |

\* Indicate "T" for Terminal or "W" for Wire leads