


OA172SAP XF Series



High Performance AC Fans - 115, 230V
172mm x 150mm x 55mm (6.8" x 5.9" x 2.0")

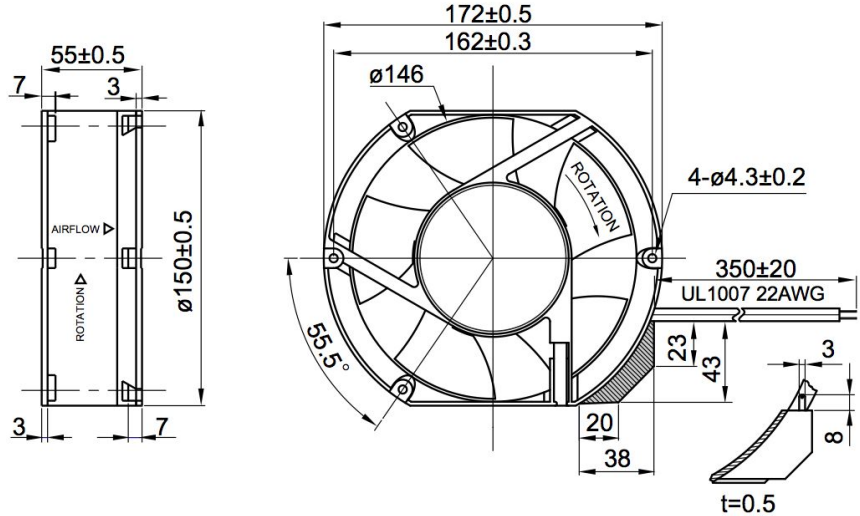

Frame	Die Cast Aluminum, Black Painted	Operating Temperature -40°C ~ +85°C	Static Pressure ("H₂O") Airflow (CFM) * 60Hz values shown in table and PQ airflow chart.
Impeller	PBT, UL94 V-0 Plastic	Storage Temperature -40°C ~ +100°C	
Connection	Wire Leads or Terminals	Life Expectancy 40,000 Hours (L10 at 45°C)	
Motor	Capacitor Induction, Single Phase, Auto Cutoff, Auto Reset, Thermally Protected, Class F Insulation	Installed Options Class F Insulation	
Bearing System	Dual Ball Bearings	Available Options Wire Lead Type	
Dielectric Strength	1500VAC/min, <5mA	Weight: 2.7 lbs.	
Insulation Resistance	≥100MΩ @ 500 VDC		

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Rated Current (Amps)	Locked Current (Amps)	Rated Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O")
OA172SAP-11-1*BXF	115	100 ~ 130	50 / 60	0.34	0.76	38	3400	293	60	0.90
OA172SAP-22-1*BXF	230	200 ~ 260	50 / 60	0.17	0.38	38	3400	293	60	0.90

*Insert "T" for Terminal type power connection, or "W" for wire lead type power connection.