


OA180AP-IP68 Series



AC Fan, 115, 230V
176x89mm (7"x3.5")

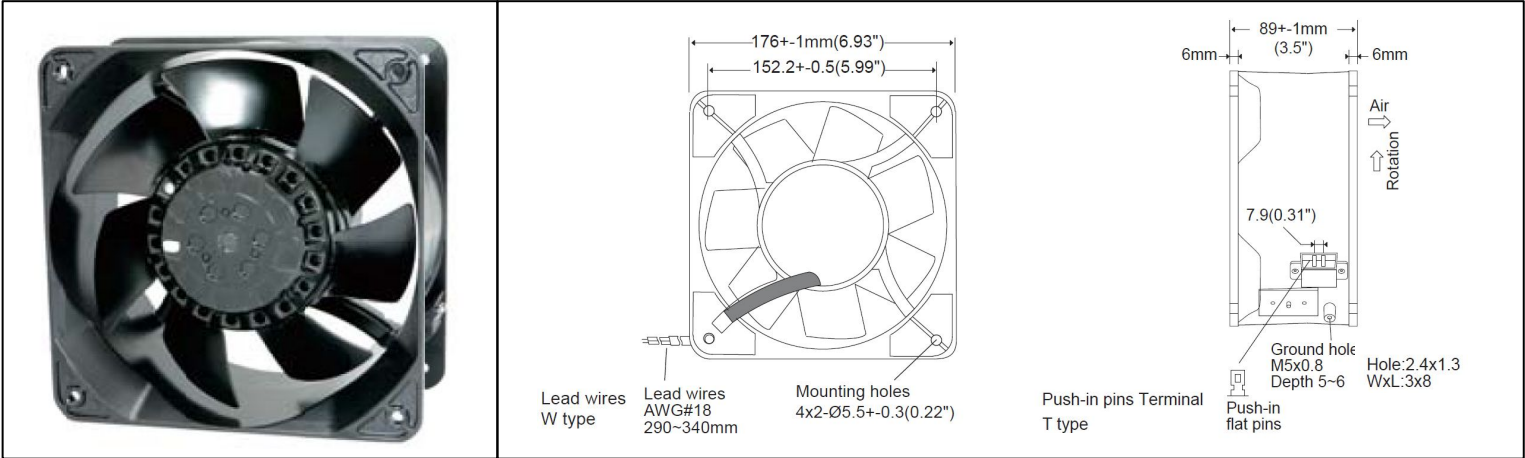

Frame	Die Cast Aluminum, Black	<p>Operating Temperature -30°C ~ +80°C</p> <p>Storage Temperature -40°C ~ +100°C</p> <p>Life Expectancy 50,000 hours (L10 at 55°C)</p> <p>Weight: 4.08 lbs</p>	
Impeller	Steel, All Metal, 7 Blades		
Connection	Lead wires 18AWG or Terminal		
Motor	AC, Outer Rotor, Capacitor Induction, 1-Phase, Thermally Protected, IP68		
Bearing System	Dual Ball Bearings		
Dielectric Strength	1500VAC/min		
Insulation Resistance	Over 100MΩ at DC 500V		

Part Number	Rated Voltage	Input Power	Frequency	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dB)	Max. Static Pressure
OA180AP-11-1*B1868	115 VAC	80 W	60 Hz	3250	380	63	0.76"H ₂ O
OA180AP-22-1*B1868	230 VAC	80 W	60 Hz	3250	380	63	0.76"H ₂ O

*Insert T for Terminal or W for Lead Wires