


OA180APL-IP68 Series



AC Fan, 115, 230V
180x65mm (7"x2.5")

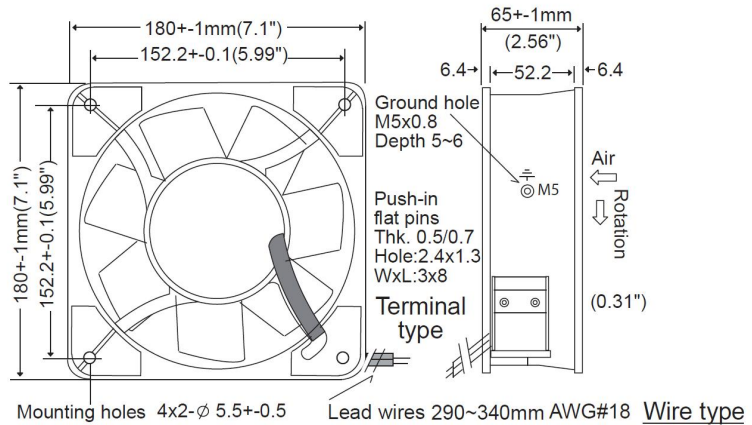

Frame	Die Cast Aluminum, Black	Operating Temperature -30°C ~ +80°C Storage Temperature -40°C ~ +100°C Life Expectancy 50,000 hours (L10 at 55°C) Weight: 3.96 lbs m0	<p>Static Pressure ("H₂O") vs Airflow (CFM)</p> <p>Legend: --- 50Hz, — 60Hz</p>
Impeller	Steel, All Metal, 7 Blades		
Connection	Lead wires 18AWG or Terminal		
Motor	AC, Outer Rotor, Capacitor Induction, 1-Phase, Thermally Protected, IP68		
Bearing System	Dual Ball Bearings		
Dielectric Strength	1500VAC/min		
Insulation Resistance	Over 100MΩ at DC 500V		

Part Number	Rated Voltage	Input Power	Frequency	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dB)	Max. Static Pressure
OA180APL-11-1*B1868	115 VAC	80 W	60 Hz	3250	400	65	0.8"H ₂ O
OA180APL-22-1*B1868	230 VAC	80 W	60 Hz	3250	400	65	0.8"H ₂ O

*Insert T for Terminal or W for Lead Wires