



# OA200AN All Metal Series



AC Fans - 115, 230V  
220mm x 70mm (8.7" x 2.8")

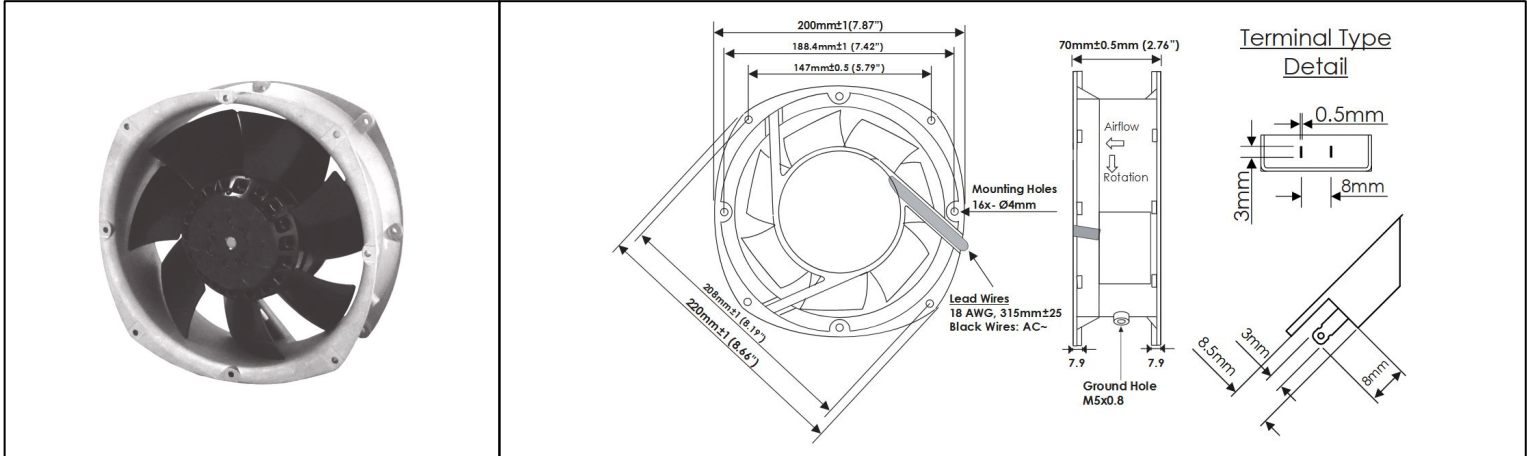

Frame	Die Cast Aluminum, Natural Finish	<b>Operating Temperature</b> -30°C ~ +80°C  <b>Storage Temperature</b> -40°C ~ +100°C  <b>Life Expectancy</b> 50,000 Hours (L10 at 55°C)  <b>Installed Options</b> IP56 Rated Motor  <b>Weight:</b> 4.63 lbs.
Impeller	Steel, All Metal, 7 Blades	
Connection	Lead Wires, UL 3122 18 AWG, or Terminals	
Motor	AC, Capacitor Induction, Single Phase, Thermally Protected, IP56	
Bearing System	Dual Ball Bearings	
Dielectric Strength	1500VAC/min, <1mA	
Insulation Resistance	≥10MΩ @ 500V DC	

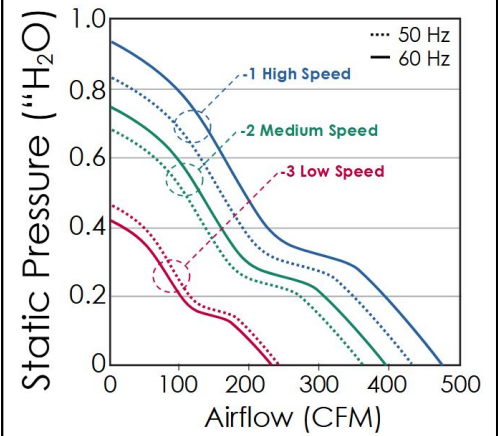

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure (\"H <sub>2</sub> O)
OA200AN-11-1*B1856	115	100 ~ 130	50 / 60	95 / 105	2775 / 3300	430 / 485	68.2	0.82 / 0.93
OA200AN-11-2*B1856	115	100 ~ 130	50 / 60	80 / 95	2350 / 2600	365 / 395	54.4	0.68 / 0.75
OA200AN-11-3*B1856	115	100 ~ 130	50 / 60	32 / 40	1600 / 1425	245 / 230	43.1	0.46 / 0.42
OA200AN-22-1*B1856	230	200 ~ 255	50 / 60	95 / 105	2775 / 3300	430 / 485	68.2	0.82 / 0.93
OA200AN-22-2*B1856	230	200 ~ 255	50 / 60	80 / 95	2350 / 2600	365 / 395	54.4	0.68 / 0.75
OA200AN-22-3*B1856	230	200 ~ 255	50 / 60	32 / 40	1600 / 1425	245 / 230	43.1	0.46 / 0.42

\*Insert "T" for Terminal type power connection, or "W" for Wire Lead type power connection.