



# OA200AP-IP68 Series



AC Fan, 115, 230V  
220x70mm (7.8"x2.8")

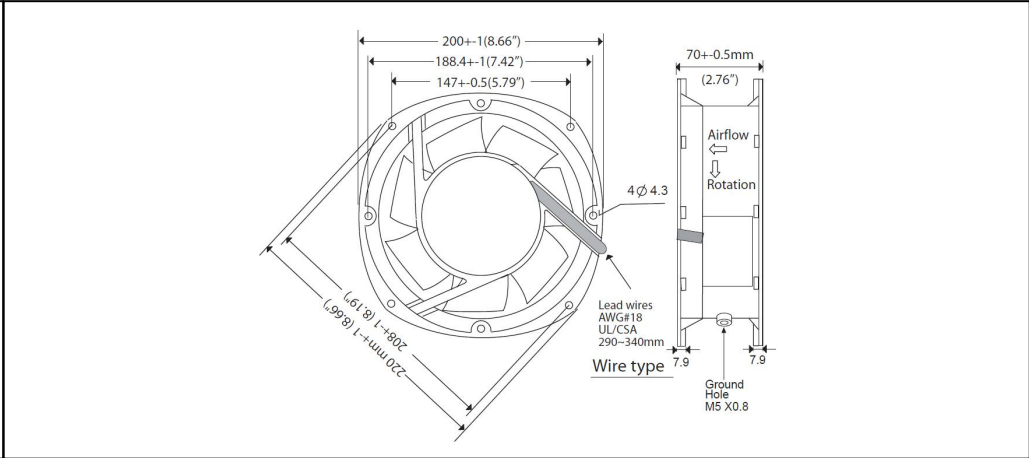

Frame	Die Cast Aluminum, Black	<b>Operating Temperature</b> -30°C ~ +80°C  <b>Storage Temperature</b> -40°C ~ +100°C  <b>Life Expectancy</b> 50,000 hours (L10 at 55°C)  Weight: 4.63 lbs  m0
Impeller	Steel, All Metal	
Connection	Lead wires 18AWG or Terminal	
Motor	AC, Outer Rotor, Capacitor Induction, 1-Phase, Thermally Protected, IP68	
Bearing System	Dual Ball Bearings	
Dielectric Strength	1500VAC/min	
Insulation Resistance	Over 100MΩ at DC 500V	

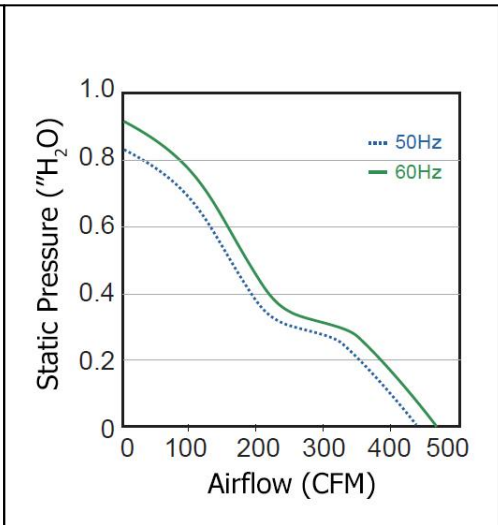

Part Number	Rated Voltage	Input Power	Frequency	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dB)	Max. Static Pressure
OA200AP-11-1*B1868	115 VAC	105 W	60 Hz	3300	485	68	0.93"H <sub>2</sub> O
OA200AP-22-1*B1868	230 VAC	105 W	60 Hz	3300	485	68	0.93"H <sub>2</sub> O

\*Insert T for Terminal or W for Lead Wires