


# OA225AP All Metal IP Rated Series



AC Fans - 115, 230V  
225mm x 80mm (8.9" x 3.2")

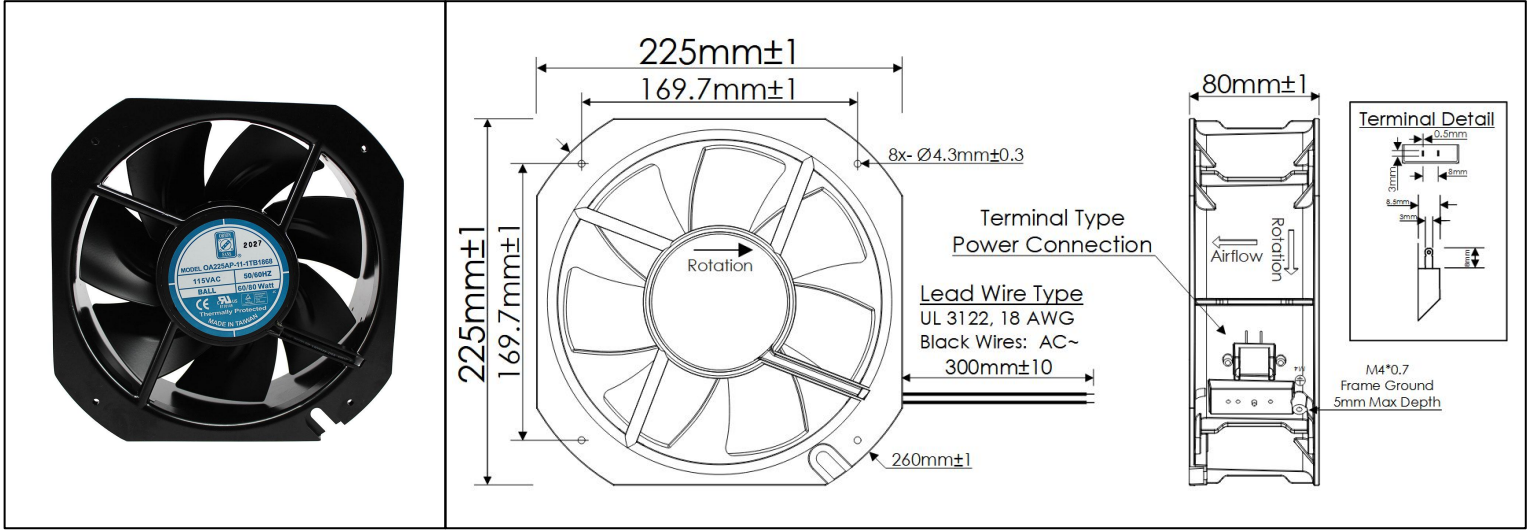

<b>Frame</b>	Die Cast Aluminum, Black Finish	<b>Operating Temperature</b> -30°C ~ +80°C  <b>Storage Temperature</b> -40°C ~ +100°C  <b>Life Expectancy</b> 45,000 Hours (L10 at 55°C)  <b>Installed Options</b> IP Rating  <b>Available Options</b> Tachometer Output Alarm Output Other Speeds Available  Weight: 4.81 lbs.
<b>Impeller</b>	Steel Alloy, Black Finish	
<b>Connection</b>	Lead Wires, UL 3122 18 AWG, or Terminals	
<b>Motor</b>	AC, Capacitor Induction, Single Phase, Thermally Protected	
<b>Bearing System</b>	Ball Bearings	
<b>Dielectric Strength</b>	1500VAC/min, <5mA	
<b>Insulation Resistance</b>	≥100MΩ @ 500VAC	

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure (\"H <sub>2</sub> O)
OA225AP-11-1*B18IPxx	115	100 ~ 130	50 / 60	60 / 80	2600 / 3000	540 / 620	66.2	0.80 / 0.74
OA225AP-22-1*B18IPxx	230	200 ~ 255	50 / 60	60 / 80	2600 / 3000	540 / 620	66.2	0.80 / 0.74

\*Insert "T" for Terminal or "W" for Lead Wire  
xx = Insert "68" for IP68 Rated or "69K" for IP69K rating