





OA2543AP

All Metal IP Rated Series

AC Fans - 115, 230V
254mm x 89mm (10.0" x 3.5")

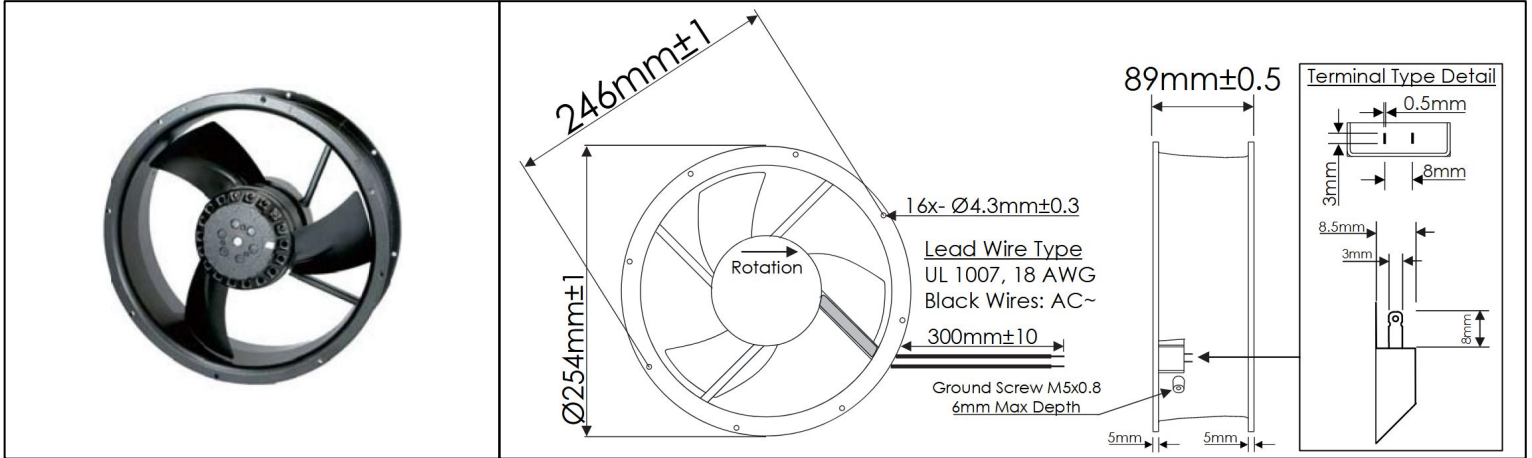

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -30°C ~ +80°C <u>Storage Temperature</u> -40°C ~ +100°C <u>Life Expectancy</u> 50,000 Hours (L10 at 55°C) <u>Installed Options</u> IP68 or IP69K Rated Motor Weight: 5.18 lbs.
Impeller	Steel Alloy, 3 Blades, Black Finish	
Connection	2x Lead Wires, UL 3122 18 AWG, or Terminals	
Motor	AC, Capacitor Induction, Single Phase, Thermally Protected, IP68 or IP69K	
Bearing System	Dual Ball Bearings	
Dielectric Strength	1500VAC/min, <5mA	
Insulation Resistance	≥10MΩ @ 500V DC	

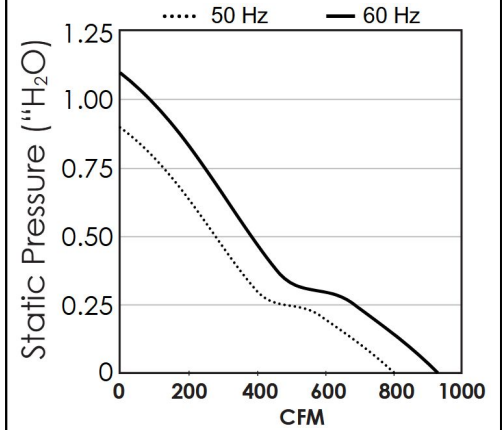

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O")
OA2543AP-11-1*B18***	115	100 ~ 130	50 / 60	95 / 105	2750 / 3300	800 / 930	67	0.9 / 1.1
OA2543AP-22-1*B18***	230	200 ~ 240	50 / 60	95 / 105	2750 / 3300	800 / 930	67	0.9 / 1.1

* Insert "T" for Terminal type power connection, or "W" for Lead Wire type power connection

*** Insert "68" for IP68 Rated Motor, or "69K" for IP69K Rated Motor