
OD4006-05HHS



DC Fan, 05V High Speed 40x40x06mm (1.57"x0.24")



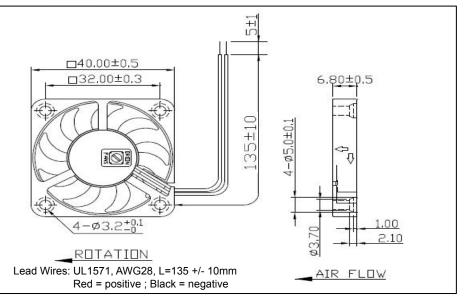

Frame & Impeller	PBT UL94V0- Plastic
Connection	Wire Leads AWG #28
Motor	Brushless DC, auto cutoff, auto restart, electronically protected, nonpolarity protected
Bearing System	Sealed Sleeve
Dielectric Strength	500VAC/min
Insulation Resistance	10M ohm between leadwire and frame (500VDC)


Operating Temperature -10°C ~ +70°C

Storage Temperature -40°C ~ +70°C

Life Expectancy 50,000 hours (L10 at 25°C)

Weight: 0.02 lbs

m1



Part Number	OD4006-05HSS
Rated Voltage	5.0 VDC
Voltage Range	4.5 ~ 5.5
Input Power	0.6 W
Rated Current	0.12 A
Rated Speed (RPM)	6300
Airflow (CFM)	5.4
Noise Level (dB)	30.5
Max. Static Pressure	0.08"H ₂ O







