


# OD4006-12HSS



DC Fans - 12V  
40mm x 6.8mm  
(1.57" x 0.27")

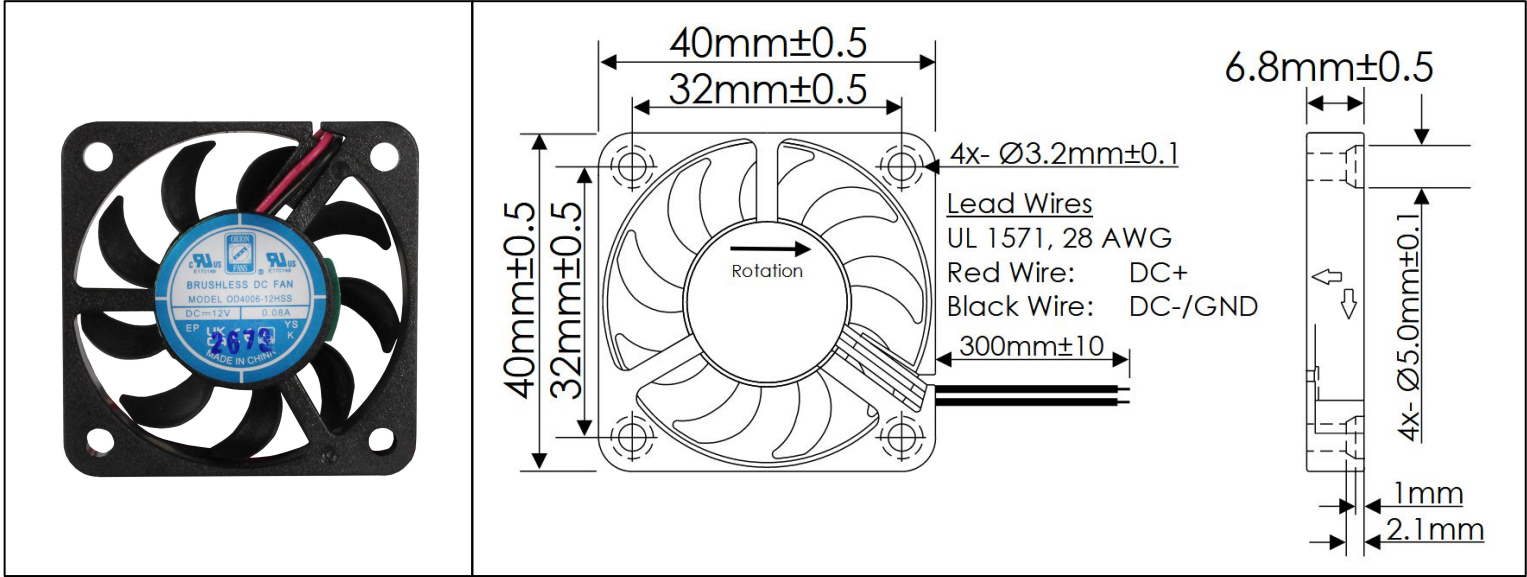

Frame & Impeller	PBT, UL94V-0 Plastic	<u>Operating Temperature</u> -10°C ~ +70°C  <u>Storage Temperature</u> -40°C ~ +70°C  <u>Life Expectancy</u> 50,000 Hours (L10 at 25°C)  Weight: 0.02 lbs	
Connection	Wire Leads, 28 AWG		
Motor	Brushless DC, Auto Cutoff, Auto Restart, Electronically Protected		
Bearing System	Sealed Sleeve		
Dielectric Strength	500VDC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500 VDC		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H <sub>2</sub> O)
OD4006-12HSS	12	10.8 ~ 13.2	0.96	0.08	6300	5.4	31.1	0.08