


# OD4010 Sealed Sleeve Series



DC Fans - 5, 12, 24V  
40mm x 40mm x 10.5mm (1.6" x 0.4")

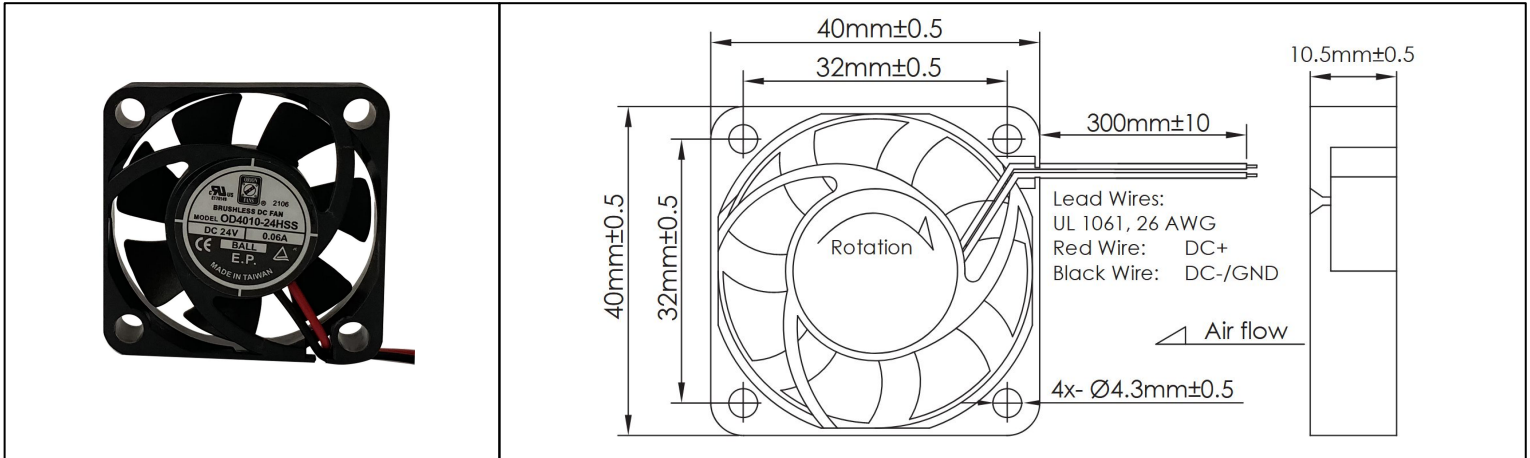

<b>Frame</b>	PBT, UL94 V-0 Plastic	<b>Operating Temperature</b> -10°C ~ +70°C  <b>Storage Temperature</b> -20°C ~ +75°C  <b>Life Expectancy</b> 50,000 Hours (L10 at 45°C)  <b>Available Options</b> PWM Speed Control Input Tachometer Output Alarm Output  Weight: 0.044 lbs	
<b>Impeller</b>	PBT, UL94 V-0 Plastic		
<b>Connection</b>	2x Lead Wires, 26 AWG		
<b>Motor</b>	Brushless DC, Auto Cutoff, Auto Restart, Polarity Protected, Electronically Protected		
<b>Bearing System</b>	Sealed Sleeve		
<b>Dielectric Strength</b>	500VDC/min, <1mA		
<b>Insulation Resistance</b>	≥10MΩ @ 500 VDC		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)(Max)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H <sub>2</sub> O)
OD4010-05HSS	5	4.5 ~ 5.5	0.50 (1.50)	0.10 (0.30)	8000	9.2	33.2	0.20
OD4010-12HSS	12	10.8 ~ 13.2	0.84 (1.44)	0.07 (0.12)	8000	9.2	33.2	0.20
OD4010-24HSS	24	21.6 ~ 26.4	1.44 (1.92)	0.06 (0.08)	8000	9.2	33.2	0.20