



# OD8025-05 Series



DC Fan, 5V  
80x80x25mm (3.15"x1")

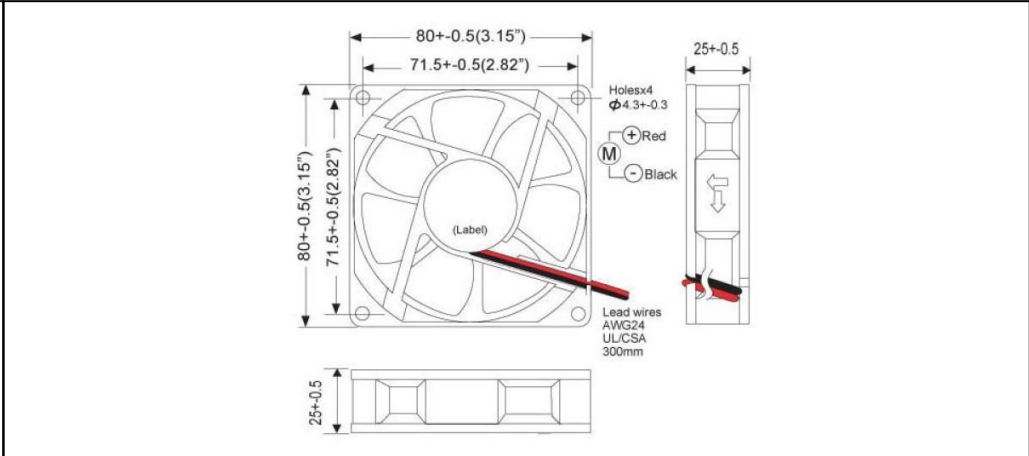

Frame	PBT, UL94 V-0 plastic	<b>Operating Temperature</b> -20°C ~ +65°C  <b>Storage Temperature</b> -25°C ~ +75°C  <b>Life Expectancy</b> 60,000 hours (L10 at 45°C)  <b>Available Options</b> Tachometer Alarm PWM  Weight: 0.19 lbs  m0
Impeller	PBT, UL94 V-0 plastic	
Connection	2x Lead wires, 24 AWG	
Motor	Brushless DC, Auto Restart, Auto Cutoff, Polarity Protected, Electronically Protected	
Bearing System	Dual Ball Bearings	
Dielectric Strength	500VAC/min < 1mA	

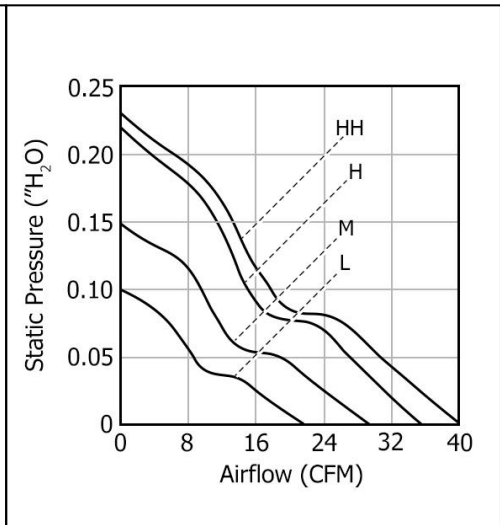

Part Number	Rated Voltage	Input Power	Rated Current	Rated Speed (RPM)	Airflow (CFM)	Noise Level (dB)	Max. Static Pressure
OD8025-05HHB	5 VDC	1.4 W	0.28 A	3200	40	33	0.23" H <sub>2</sub> O
OD8025-05HB	5 VDC	1.4 W	0.28 A	2800	35	32	0.22" H <sub>2</sub> O
OD8025-05MB	5 VDC	1.0 W	0.20 A	2200	30	27	0.15" H <sub>2</sub> O
OD8025-05LB	5 VDC	0.8 W	0.15 A	1800	22	21	0.10" H <sub>2</sub> O