


OD9225 XE Series



DC Fans - 12, 24, 48V
92mm x 25mm (3.6" x 1.0")

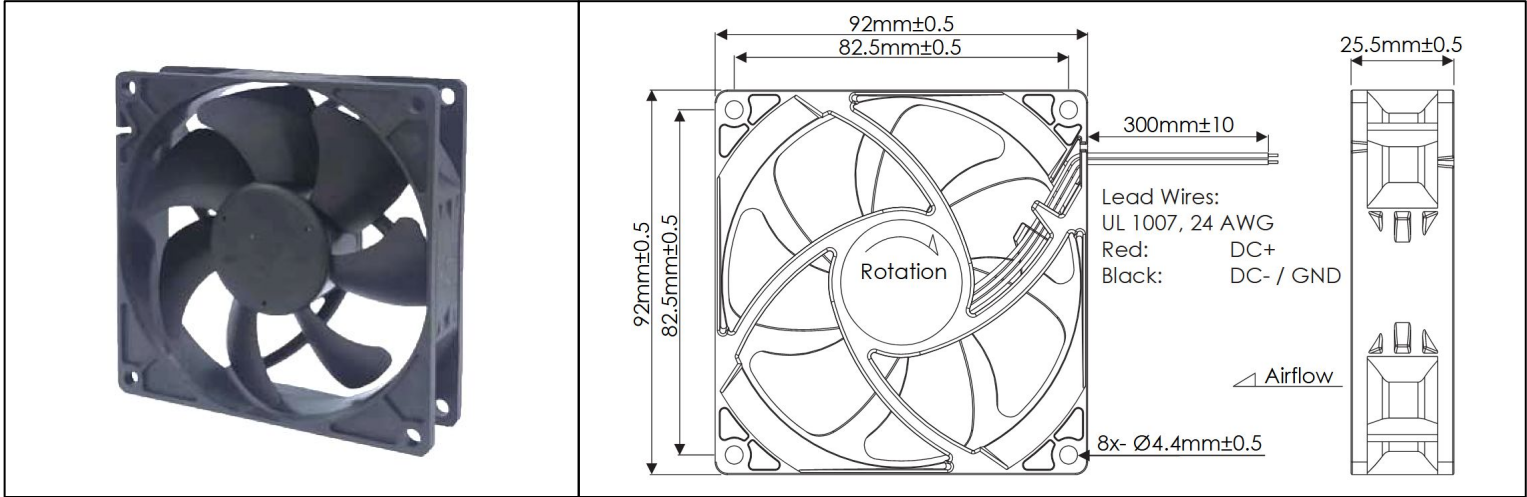

Frame	PBT, UL94 V-0 Plastic	Operating Temperature -20°C ~ +65°C Storage Temperature -20°C ~ +75°C Life Expectancy 70,000 Hours (L10 at 40°C) Available Options Tachometer Output Alarm Output PWM Speed Control Input IP Ratings Weight: 0.18 lbs.	
Impeller	PBT, UL94 V-0 Plastic		
Connection	2x Lead Wires, 24 AWG		
Motor	Brushless DC, Auto Cutoff, Auto Restart, Polarity Protected, Electronically Protected		
Bearing System	Ball Bearings		
Dielectric Strength	500VDC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500V DC		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)(Max)	Rated Current (Amps)(Max)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OD9225-12HHBXE	12	8 ~ 13.8	10.2	0.85	5475	102.7	55.2	0.58
OD9225-12HBXE	12	8 ~ 13.8	8.4	0.70	5000	93.8	53	0.47
OD9225-12MBXE	12	8 ~ 13.8	5.4	0.45	4490	84.6	50.2	0.40
OD9225-12LBXE	12	8 ~ 13.8	4.2	0.35	4000	75.7	48.0	0.31
OD9225-24HHBXE	24	15 ~ 26	10.3	0.43	5475	102.7	55.2	0.58
OD9225-24HBXE	24	15 ~ 26	8.4	0.35	5000	93.8	53	0.47
OD9225-24MBXE	24	15 ~ 26	5.5	0.23	4490	84.6	50.2	0.40
OD9225-24LBXE	24	15 ~ 26	4.6	0.19	4000	75.7	48.0	0.31
OD9225-48HHBXE	48	28 ~ 52	14.4	0.30	5475	102.7	55.2	0.58
OD9225-48HBXE	48	28 ~ 52	9.6	0.20	5000	93.8	53	0.47
OD9225-48MBXE	48	28 ~ 52	7.2	0.15	4490	84.6	50.2	0.40
OD9225-48LBXE	48	28 ~ 52	4.0	0.10	4000	75.7	48.0	0.31