
OD9238 Series - High Speed



DC Fan - 12V, Tachometer, PWM 92x38mm (3.62" x 1.5")



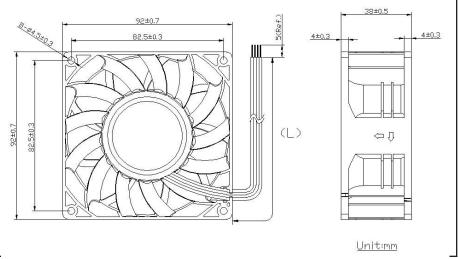

Frame & Impeller	PBT, UL94V-O plastic
Connection	4x Lead wires *
Motor	Brushless DC, auto restart, polarity protected.
Bearing System	Dual ball bearing
Insulation Resistance	Min. 10M at 500VDC
Dielectric Strength	1 minute at 500VAC / 1 second, max leakage 500 microamp
Temperature Range	-20C ~ +70C
Storage Temperature	-40C ~ +80C
Life Expectancy	50000 hours (40C)

Available Options:


* Connection: Red (+) Black (-) White - Tachometer Open Collector Blue - PWM

UL1430, 24AWG ~300mm

Weight: ~ 255 g

	2.00	
("H2O	1.50	
Static Pressure ("H2O)	1.00	
atic Pre		
Š	0.50	
	0.00 0 30 60 90 120 150 180	
Airflow (CFM)		

Part Number	OD9238-12HHBXC10A
Nominal Voltage	12 VDC
Nominal Current	3.5 A
Real Power	42 W
Rated Speed (RPM)	8000
Airflow (CFM)	174
Noise Level (dB)	68
Max. Static Pressure	1.7" H ₂ O

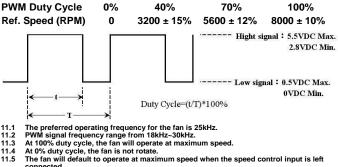

At 25kHz with 20% duty cycle (Vcc = 24VDC), the fan will be able to start from a dead stop.

