


OA254AP Series with Salt Fog IP68 Rating



AC Fans - 115, 230V
254mm x 89mm (10" x 3.5")

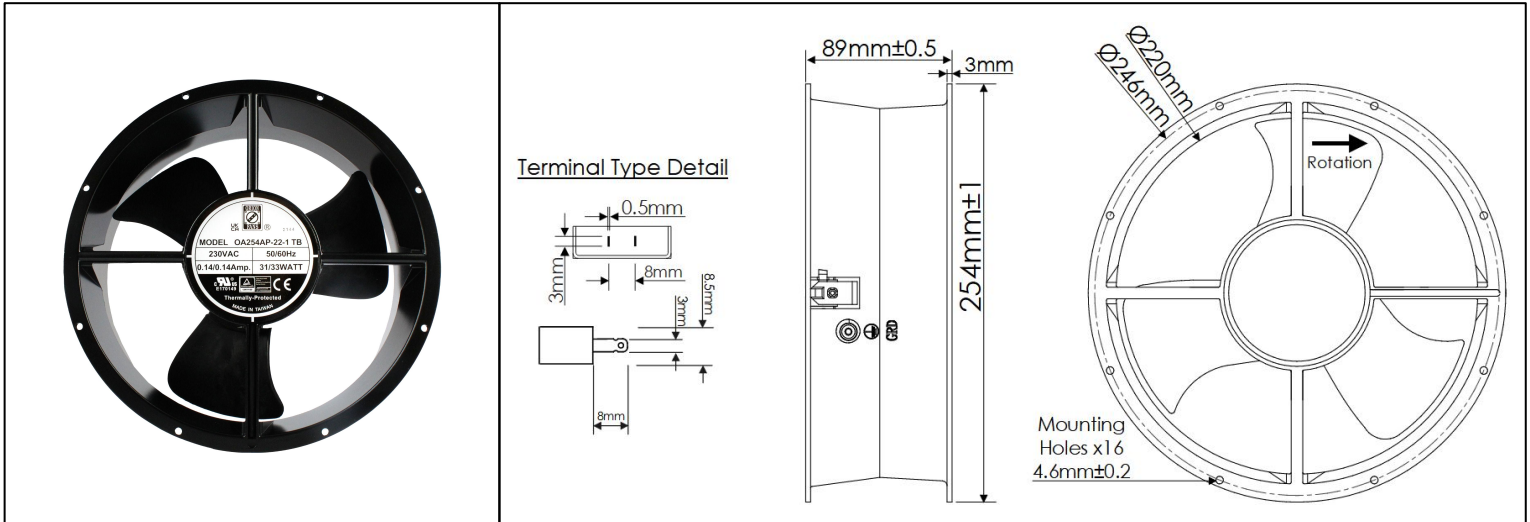

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -20°C ~ +80°C <u>Storage Temperature</u> -40°C ~ +80°C <u>Life Expectancy</u> 60,000 Hours (L10 at 40°C) <u>Installed Options</u> Salt Fog / IP68 Rated Motor Weight: 4.2 lbs.
Impeller	PBT, UL94 V-0 Plastic	
Connection	Fan Terminals	
Motor	AC Capacitor Induction, Thermally Protected, IP68, Salt Fog	
Bearing System	Ball Bearings	
Dielectric Strength	1500VAC/min, <1mA	
Insulation Resistance	≥10MΩ @ 500 VDC	

Part Number	Rated Voltage (Volts AC)	Frequency Range (Hertz)	Voltage Range (Volts AC)	Rated Current (Amps)	Locked Current (Amps)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure (\"H ₂ O)
OA254AP-11-1TBSF	115	50 / 60	80 ~ 130	0.30 / 0.29	0.53 / 0.51	31 / 33	1400 / 1650	460 / 547	52 / 55	0.32 / 0.39
OA254AP-22-1TBSF	230	50 / 60	160 ~ 260	0.14 / 0.14	0.26 / 0.26	31 / 33	1400 / 1650	460 / 547	52 / 55	0.32 / 0.39