


# OAT615 Fan Tray



Universal Input 90 -264VAC

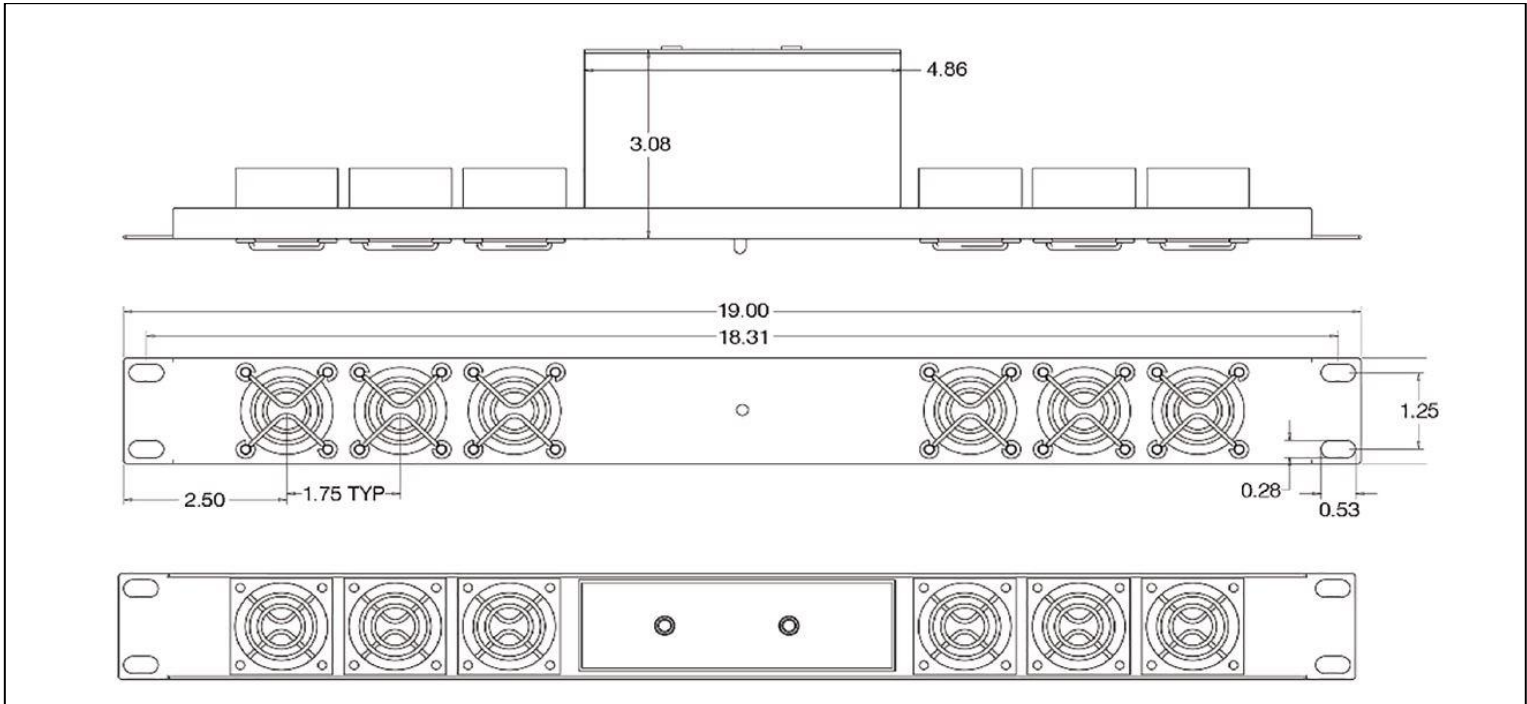

Switching AC/DC Adaptor	12V	<u>Operating Temperature</u> -10°C ~ +50°C, 20 - 90% RH
DC Output Power	60 W (Max Load 5A)	<u>Storage Temperature</u> -40°C ~ +85°C, 10 - 95% RH

Description	<ul style="list-style-type: none"> <li>• Supplied with included Universal 90-264VAC Input external power supply</li> <li>• 1U High, Rack mount configuration</li> <li>• Cord options of either IEC320 C13 to NEMA 5-15P, or IEC320 C13 to IEC320 C14, 6' long</li> <li>• High combined airflow of 160CFM provided by 6x Orion OD4028-12HBXC</li> <li>• Bi-Color LED alarm indicator lamp</li> <li>• Optional redundant 2nd power supply available</li> <li>• Redundant power switching is seamless and automatic</li> <li>• Tray power input may be from customers 12V DC supply using Center-Positive 2.1mm I.D. x 5.5mm O.D. DC barrel connector</li> <li>• Sturdy 16 Gauge Powder Coated Steel Construction</li> </ul>
-------------	---

OAT615	Fan Tray with power supply and 6' cord with NEMA 5-15 plug
OAT615-IEC	Fan Tray with power supply and 6' cord with IEC320 C14 plug
OAT615-DUAL	Fan Tray with 2x power supplies, redundant configuration, including 6' cords with NEMA 5-15P plugs
OAT615-IEC-DUAL	Fan Tray with 2x power supplies, redundant configuration, including 6' cords with IEC320 C14 plugs
OAT615-PS:	Add-on power supply. Needed for OA615 Dual redundant capability. Includes 6' cord with NEMA 5-15P plug
OAT615-IEC-PS	Add-on power supply. Needed for OA615 Dual redundant capability. Includes 6' cord with IEC320 C14 plug

